

HOBART701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com**610
SLICER****HOBART****STANDARD FEATURES**

- ½ H.P. Knife Drive motor
- Belt Driven
- Two-Stone Knife Sharpener
- Rear-Mounted Meat Grip
- Anodized Aluminum Base with Rounded Surfaces
- 10" Hollow Ground Carbon Steel Knife
- Anodized Aluminum Removable Carriage and Knife Cover
- Removable Rear Deflector
- Cleaning Brush
- 6' Flexible Three-Wire Cord and Plug

MODEL

- 610 – Manual Slicer, 120/60/1

**610 SLICER**

610 SLICER

HOBART

701 S Ridge Avenue, Troy, OH 45374
1-888-4HOBART • www.hobartcorp.com

SOLUTIONS/BENEFITS

1/5 H.P. Knife Drive Motor

Durability & Performance

- Reserve power runs at 342 RPM for optimum results

Belt Driven

Durability & Reduced Maintenance

- Quieter operating slicer
- More economical for service and repairs with reduced parts and reduced service time

Two-stone Knife Sharpener

Ease of Use

- Two-stone sharpener and hone, thumbscrew lock for positioning, stores under slicer

Rear-Mounted Meat Grip

Performance, Ease of Use

- Self Adjusting
- Grips product on top and serves as pusher plate for end pieces
- Swings out of way when not in use

Removable Rear Deflector

Improved Sanitation, Ease of Use

- Allows access for through cleaning
- No tools required means easy removal during cleaning

Anodized Aluminum Finish with Rounded Surfaces

Improved Sanitation

- Resists tarnish, stains, rust, peeling and cracking
- One-piece base with rounded surfaces
- All surfaces are durable and smooth; presenting no holes or crevices in which food can lodge

10" Hollow Ground Carbon Steel Knife

Performance

- Positive angle carriage design enables operator to slice without manual feed

Anodized Aluminum Carriage and Knife Cover

Ease of Cleaning

- Carriage and knife cover easily removes for thorough cleaning and sanitation procedures
- Carriage has a 8 1/4" manual travel

SPECIFICATIONS

MOTOR: 1/5 H.P. Knife Drive and Grease-packed ball bearings. Single phase operation.

ELECTRICAL: 120/60/1 – UL Listed. Also available in 220/50/1 – not submitted for UL listing.

SWITCH: Moisture protected toggle-type.

CAPACITY: The carriage will take food up to 7 1/4 inches in width.

GAUGE PLATE: Anodized aluminum casting for smooth feeding and easy cleaning. Adjustable to cut any thickness of slice up to 5/8 inches.

CORD AND PLUG: 6 foot flexible three-wire cord and plug.

WEIGHTS AND DIMENSIONS:

Net Weight – 35 lbs.


Overall Length – 15 59/64".

Overall Width – 16 15/16".

Height – 15 23/64".

WARRANTY: Unit has a full one-year warranty on parts, labor and mileage against manufacturer's defects.

DETAILS AND DIMENSIONS

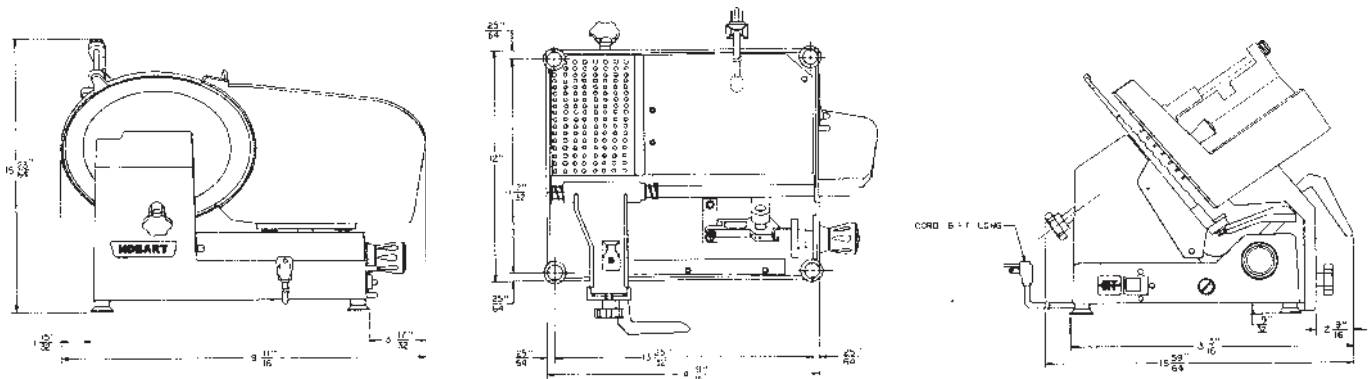

As continued product improvement is a policy of Hobart, specifications are subject to change without notice.